kW-Transmitter FPA38

Transmitter for kW, 3-phase symmetrical load
Connection to 3-phase net up to 3 x 500 VAC
Monitoring of total power consumption (√3 x U x I x cos Φ)
Built-in current transformer, ranges up to 60 AAC
Analogue output 0-20 mA / 4-20 mA
24 DC supply
Galvanic separation, input- output



C-mac® PA38 is monitoring the power consumption on 3-phase symmetrical load, primary motors. The wanted metering range is selected by means of DIP-switches, from 0-3,46 kW up to 0-41,6 kW at 3x400 VAC supply, proportional to 0-20/4-20 mA on the metering output.
0-10 V is also possible, see below.
The supply voltage, 24 VDC, and the 3 voltage phases are connected to the relevant terminals. The current is monitored by putting the current phase L1 through the built-in current transformer, see connection diagram.

Technical data:	
Supply voltage: :	24 VDC +/- 5%
Current consumption:	max. 60 mA
Operating temp.:	-15°C to +50°C
Metering range V:	3 x 200 to 3 x 500 VAC
Metering range I:	5, 10, 20, 25, 40, 60 A
Metering range f:	10-150 Hz
Accuracy:	Klasse 2
Analogue output:	Selectable 0-20 mA or 4-20 mA For 0-10 V, select 0-20 mA, and then connect pin 7 og 8 (GND og X1)
Note:	The metering output is not galvanic separated from 24 VDC supply.
Load, outputs:	Current: max. 500 Ohm Voltage: min. 100 kOhm
Note:	Output is short-circuit proof
Reaction time:	approx. 200 msec.

Metering principle.

The FPA 38 is connected to the supply, 3-phase net and load as shown above.
It can also be used together with frequency converters, as it operates in the frequency range10-150 Hz.
For monitoring of 1-phase loads, connect L2 and L3 to N, and L1 to the phase.
Since the unit is calibrated for 3-phase loads, the output signal must be multiplied with 1.5 in order to get the correct value at 1-phase loads.


Selection of metering range

The wanted ranges are selected with the DIP-switches on the side of the unit.
Select output signal, 0-20 mA or 4-20 mA with SW1. SW2, 3 and 4, selection of monitoring current, see table.

SW1	OFF =4-20 mA			ON=0-20 mA		
SW2	OFF	ON	OFF	ON	OFF	ON
SW3	OFF	OFF	ON	ON	OFF	ON
SW4	OFF	OFF	OFF	OFF	OF	ON
Amp	5	10	20	25	40	60
Kw	3,46	6,92	13,8	17,3	27,7	41,6

Note: The power ranges in the table are calculated and calibrated with a supply voltage of 400 VAC.

Connection diagram.

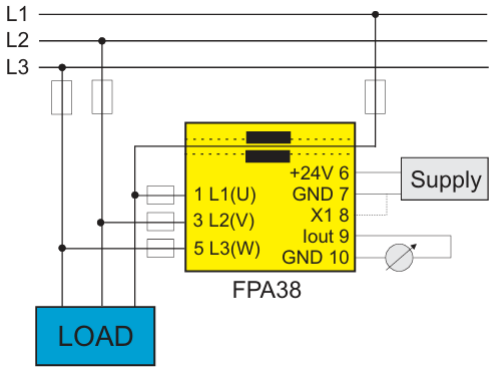

EMC and safety regulations	
Immunity:	EN50082-2
Safety: (LVD	EN 61010-1

Materials and weight:	
Housing:	NORYL UL940V-0 grå, selvslukkende
Housing bottom:	Lexan UL94V-0, sort selvslukkende
Terminals	Forzinket messing
Weight:	200g
Dimensioner:	90 x 35 x57 mm

Comadan A/S, Messingvej 60, DK-8940 Randers SV, Danmark, +45 86447877, www.comadan.com, sales@comadan.com
februar 2026