


PTC--6X30-RS03

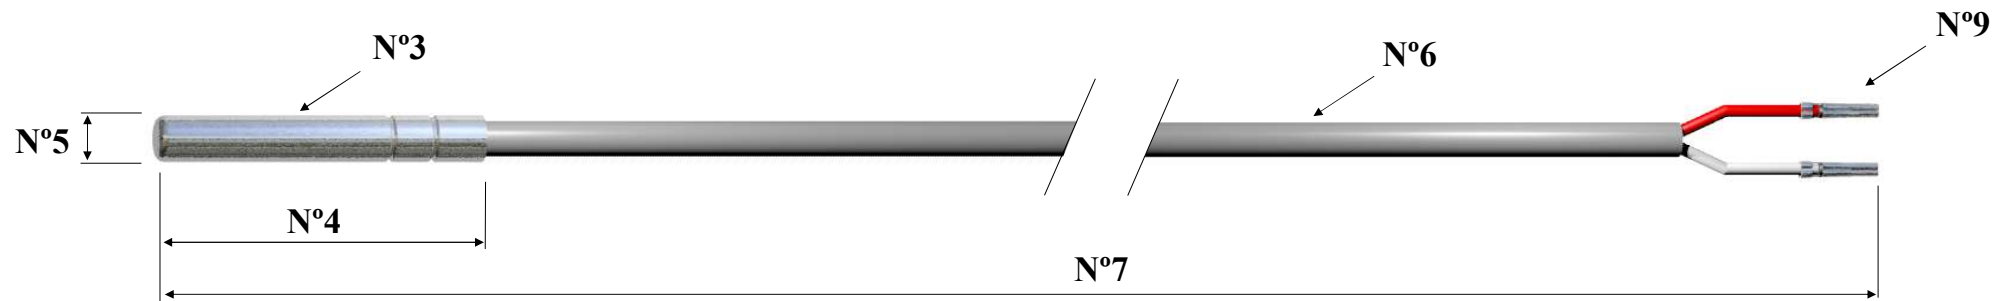

All information in this datasheet can be changed in any time without notice.

ASCON TECNOLOGIC CODE		PTC--6X30-RS03			rif.cl.		
					TECHNICAL FEATURES		
N°	GENERAL DESCRIPTION	COD.	DESCRIPTION	Toll.mm	OPERATING RANGE		(-50+120)°C
1	SERIES	P1	PTC PROBE STEEL TUBE		TOLERANCE		1%
2	ELEMENT	A	PTC KTY 81/82 - 121 1K 1%		PROTECTION GRADE		IP 67
3	MATERIAL CASE	A	Aisi 304		RESPONSE TIME		K=10" in liq. V=2m/s
4	CASE LENGHT	3	30 mm.	+/- 1.5%	TESTS		
5	Ø CASE	6	6 mm	+/- 1.5%			
6	CABEL	G	Silicone		MECHANICAL TEST		Cable-case traction kg 2/24 h
	COLOR		Cable (grey) Leads (red-white)		OHMC CHECK		25°C 1 KOhm
	DIMENSIONS		Sez. 2x0.25 mm² Ø4,6 mm	+/- 1%	INSULATION DEGREE		20 Mohm 500 Vcc
7	PROBE LENGHT	3	3 meters	+/- 3%	RIGIDITY		2000 Vac
8	CONNECTOR CABLE/CASE	N	None				
9	TERMINAL	P	Pins				
10	FILLINGS	S	Polyuretanic resin				
	OPTIONS						
	EXTRAS						
NOTE							